




两通, PN10, 双由令活接,
Two ways, PN10, union socket ball valve

产品特性 SPECIFICATIONS

★工作压力: PN10
Working Pressure :PN10

★温度范围: 15℃ ~+55℃
Temperature Range:15℃ ~+55℃

★适用介质: 水、油、气及某些腐蚀性液体
Suitable medium: water,oil,air and some corrosive liquid

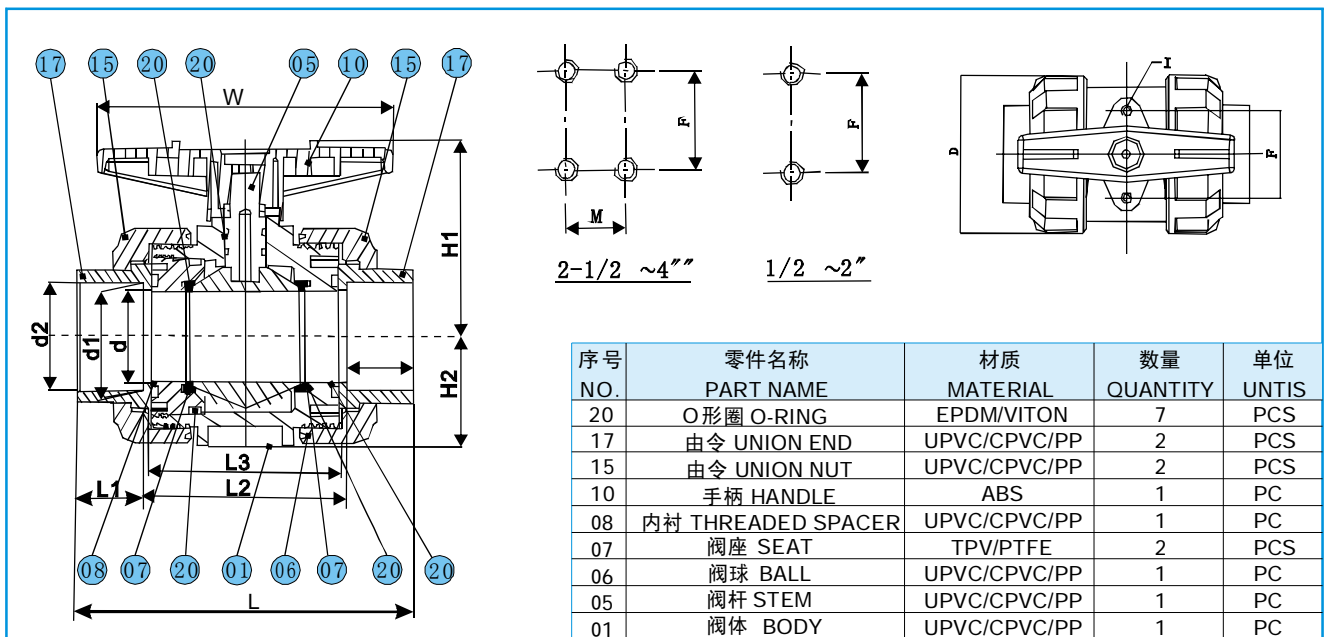

Unit: mm

口径 Size	d	d1				d2			
		d1	DIN	JIS	CNS	ANSI	DIN	JIS	CNS
1/2"(15)	15	21.54	20.30	22.30	22.40	21.23	20.10	21.70	21.90
3/4"(20)	20	26.87	25.30	26.30	26.40	26.57	25.10	25.70	25.90
1"(25)	25	33.65	32.30	32.33	34.50	33.27	32.10	31.67	33.90
1-1/4"(32)	32	42.42	40.30	38.43	42.50	42.04	40.10	37.57	41.90
1-1/2"(40)	40	48.56	50.30	48.46	48.60	48.11	50.10	47.54	47.90
2"(50)	50	60.63	63.30	60.58	60.60	60.17	63.10	59.44	59.90
2-1/2"(65)	65	73.38	75.30	76.60	76.70	72.85	75.10	75.87	75.90
3"(80)	75	89.31	90.40	89.60	89.70	88.70	90.10	88.83	88.90
4"(100)	100	114.76	110.40	114.70	115.00	114.10	110.10	113.98	113.80

Unit: mm

口径 Size	D	L		L1		DIN	L2	L3	W	H1	H2	F	M	I	Operating Torque (Nm)
		ANSI	DIN	ANSI	DIN										
		/JIS	/CNS	/JIS	/CNS										
1/2"(15)	54	104.8	92	22.3	16	60	52	84	52.5	27.5	31	—	M6	2	
3/4"(20)	63	113	100	25.5	19	62	54	90	59	32	33	—	M6	2.5	
1"(25)	73.5	127.2	114	28.6	22	70	62	106	67.5	37.25	40	—	M6	4	
1-1/4"(32)	84.5	142	130	32	26	78	70	116	77.5	42.75	52	—	M6	5	
1-1/2"(40)	98	157.5	151	35	32	87.5	79.5	128	90	50	52	—	M6	7.5	
2"(50)	118	171	171	38	—	95	85	140	106	60	70	—	M6	8.5	
2-1/2"(65)	150	238.5	238.5	47	—	144.5	132.5	210	136.5	78.5	84	45	M10	13	
3"(80)	169	268	268	51	—	166	150	235	149.5	86	84	45	M10	16	
4"(100)	211	318	318	61	—	196	172	260	175	107	121	49	M12	25	

Art. 334系列双由令U-PVC球阀选型表

Art. 334 series product ordering matrix

